




Cable
Crosshead
Systems

UMK14-1SD CROSSHEAD (Auxiliary entry: Vertical)

ISO 9001
BUREAU VERITAS
Certification





Characteristics

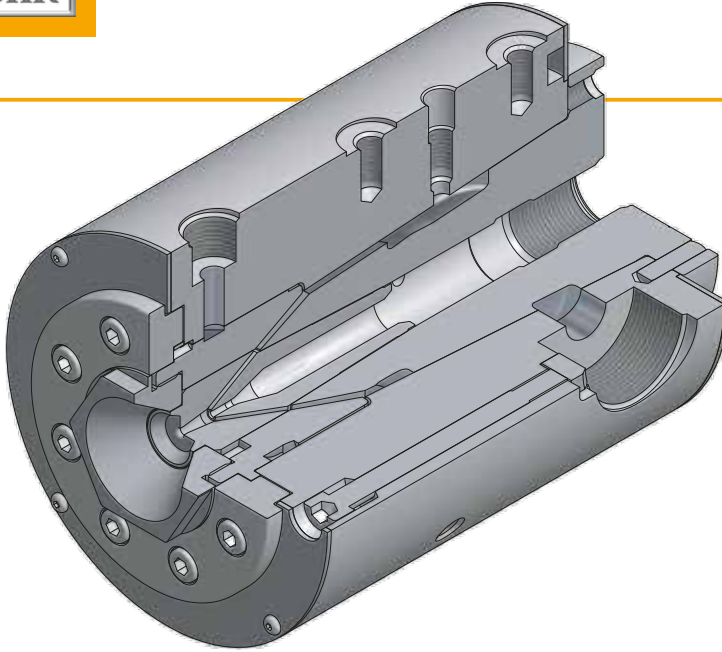

- Main entry port diameters:
Standard $\varnothing 20\text{mm}$, M50x2
- Auxiliary entry port diameters:
Standard $\varnothing 10\text{ mm}$ - M24x2
- Number of heating zones:
Crosshead 1
Main extruder connection 1
Auxiliary extruder connection 1
- Weight, approximately 31 kg

General Dimensions

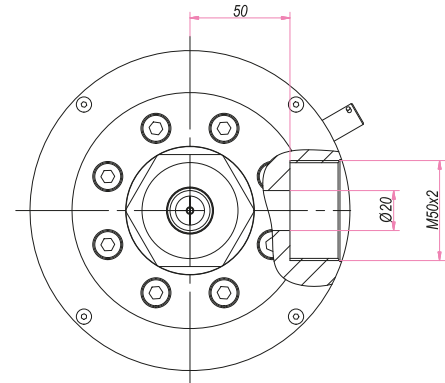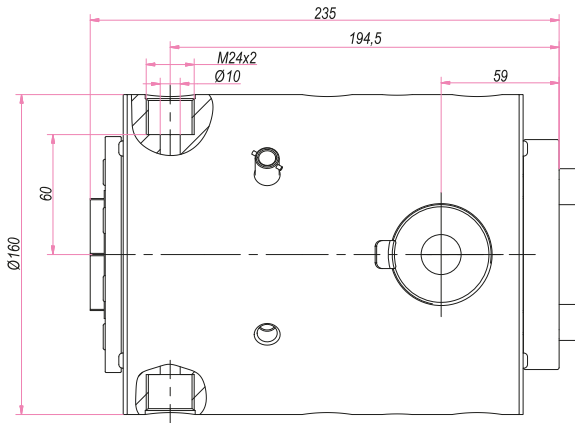


Applications


- Main applications:
Single layer
Single layer + striping
Single layer + skin coloration
- Centering system: Fix




SINGLE LAYER



STRIPE



SKIN

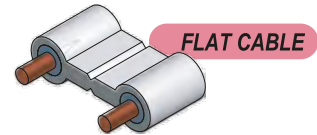

FLAT CABLE

Specifications

- With compression tooling
Maximum inlet diameter 12 mm
Maximum die diameter 14 mm
- With tubing tooling
Maximum die diameter 18 mm
- Angular index for non-round extrusion tooling

Options

- Striping
- Skin coloration
- Optimized distributor for particular polymer
- Vacuum connection
- Extruder connection:
With bypass: manual
Temperature gauge and pressure gauge
- Crosshead trolley

UYGAR
MAKİNA SANAYİ
VE
TİCARET LİMİTED
ŞİRKETİ



TEL +90.258.371 66 25 FAX +90.258.371 74 37

WEB www.um.com.tr

ADDRESS Bozburun Mahallesi 7055 Sokak

No: 5 Denizli/Turkey

E-MAIL info@um.com.tr