



Cable
Crosshead
Systems


UMK6-1SD CROSSHEAD (Auxiliary entry: Vertical)

ISO 9001

BUREAU VERITAS
Certification





Characteristics

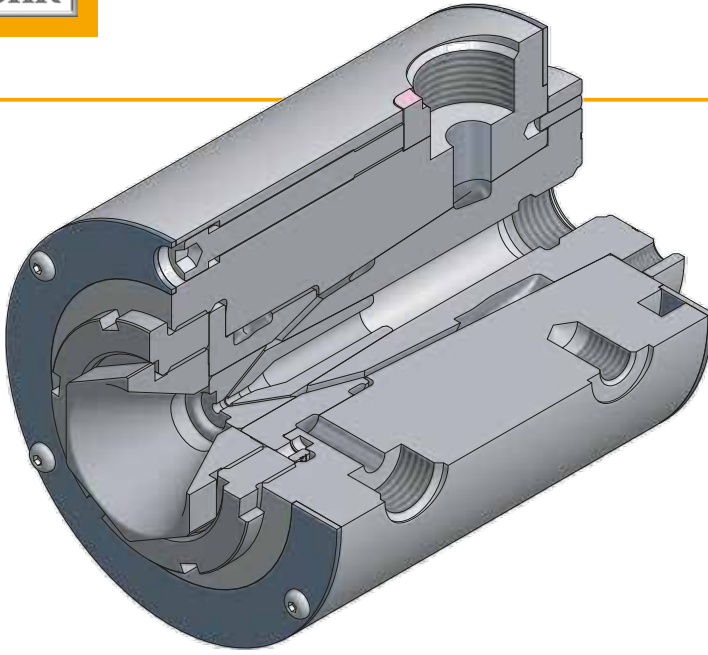

- Main entry port diameters:
Standard $\varnothing 12,5\text{mm}$, M30x2
- Auxiliary entry port diameters:
Standard $\varnothing 7\text{ mm}$ - M20x2
- Number of heating zones:
Crosshead 1
Main extruder connection 1
Auxiliary extruder connection 1
- Weight, approximately 9 kg

General Dimensions

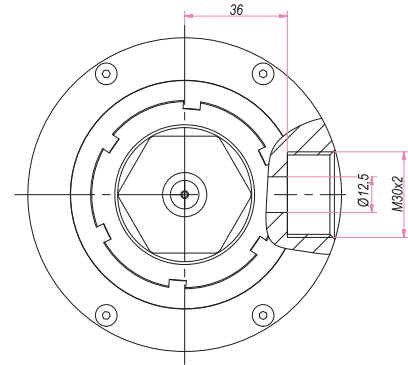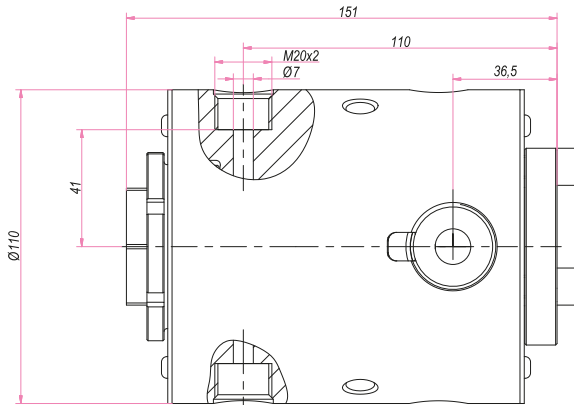


Applications

- Main applications:
Single layer
Single layer + striping
Single layer + skin coloration
- Centering system: Fix




SINGLE LAYER



STRIPE



SKIN



FLAT CABLE

Specifications

- With compression tooling
Maximum inlet diameter 6 mm
Maximum die diameter 10 mm
- With tubing tooling
Maximum die diameter 10 mm

Options

- Striping
- Skin coloration
- Optimized distributor for particular polymer
- Vacuum connection
- Extruder connection:
With bypass: manual
Temperature gauge and pressure gauge
- Crosshead trolley

UYGAR
MAKİNA SANAYİ
VE
TİCARET LİMİTED
ŞİRKETİ



TEL +90.258.371 66 25 FAX +90.258.371 74 37

WEB www.um.com.tr

ADDRESS Bozburun Mahallesi 7055 Sokak

No: 5 Denizli/Turkey

E-MAIL info@um.com.tr