



Cable
Crosshead
Systems


UMK80-1S CROSSHEAD

ISO 9001

BUREAU VERITAS
Certification





Characteristics

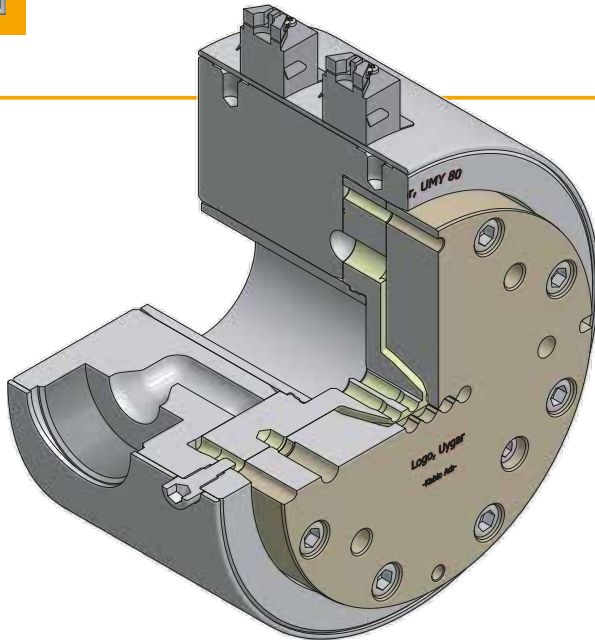


- Main entry port diameters:
Standard $\varnothing 35$ mm, M70x2
- Number of heating zones:
Crosshead 1
Main extruder connection 1
- Weight, approximately 65 kg

General Dimensions

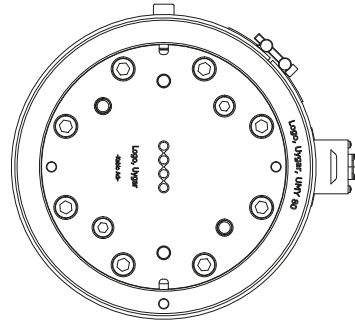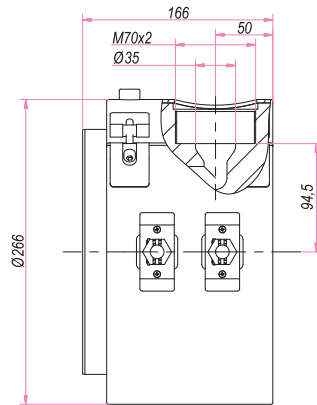


Applications

- Main applications:
Single layer
- Centering system: Fix



FLAT CABLES

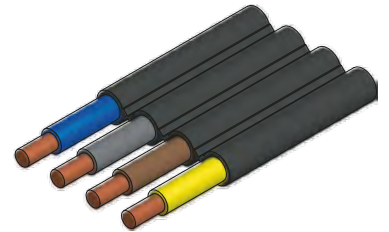

Specifications

- Cable Dimensions
Maximum cable width 80 mm
Minimum cable width 20 mm
Minimum cable height 2,5 mm

Options

- Optimized Distributor for particular polymer
- Extruder connection:
With bypass: manual
Temperature gauge and pressure gauge
- Crosshead trolley

UYGAR
MAKİNA SANAYİ
VE
TİCARET LİMİTED
ŞİRKETİ



TEL +90.258.371 66 25 FAX +90.258.371 74 37

WEB www.um.com.tr

ADDRESS Bozburun Mahallesi 7055 Sokak

No: 5 Denizli/Turkey

E-MAIL info@um.com.tr