




UMK95-1EY CROSSHEAD

ISO 9001

BUREAU VERITAS
Certification




Characteristics

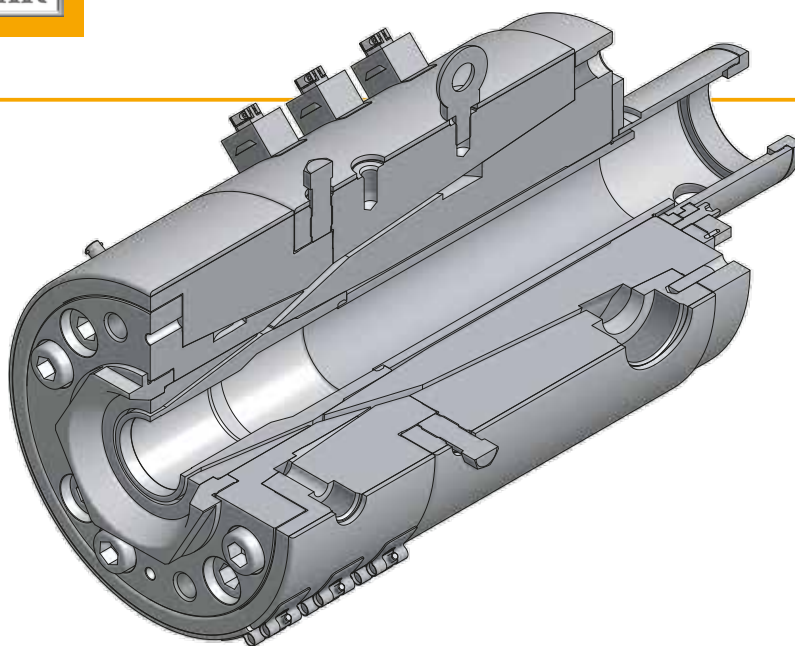


- Main entry port diameters:
Standard $\varnothing 45$ mm, M70x2
- Auxiliary entry port diameters:
Standard $\varnothing 15$ mm - M30x2
- Number of heating zones:
Crosshead 2
Main extruder connection 1
Auxiliary extruder connection 1
- Weight, approximately 270 kg

General Dimensions

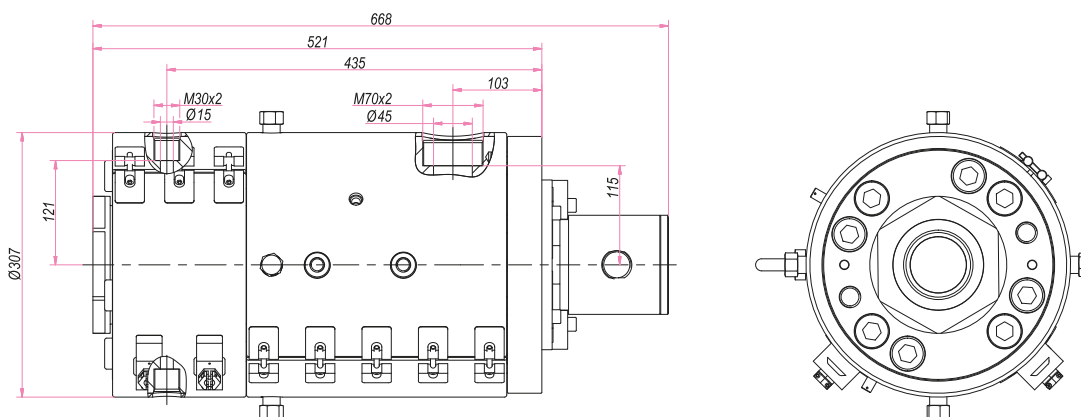

Applications

- *Main applications:*
 - Single layer*
 - Single layer + striping*
 - Single layer + skin coloration*
- *Centering system: Fix*

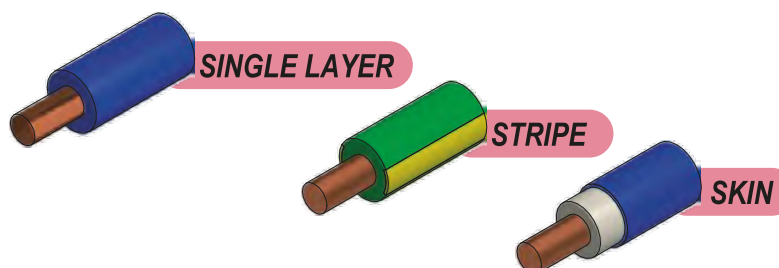

Specifications

- With compression tooling
Maximum inlet diameter 80 mm
Maximum die diameter 90 mm
- With tubing tooling
Maximum die diameter 95 mm

Options

- *Striping*
- *Skin coloration*
- *Optimized Distributor for particular polymer*
- *Vacuum connection*
- *Extruder connection:*
 - With bypass: manual*
 - Temperature gauge and pressure gauge*
- *Crosshead trolley*

UYGAR
MAKİNA SANAYİ
ve
TİCARET LİMİTED
ŞİRKETİ



TEL +90.258.371 66 25 FAX +90.258.371 74 37

WEB www.um.com.tr

ADDRESS Bozburun Mahallesi 7055 Sokak

No: 5 Denizli/Turkey

E-MAIL info@um.com.tr