




Cable
Crosshead
Systems

UMK95-1SY CROSSHEAD (Auxiliary entry: Horizontal)

ISO 9001
BUREAU VERITAS
Certification





Characteristics

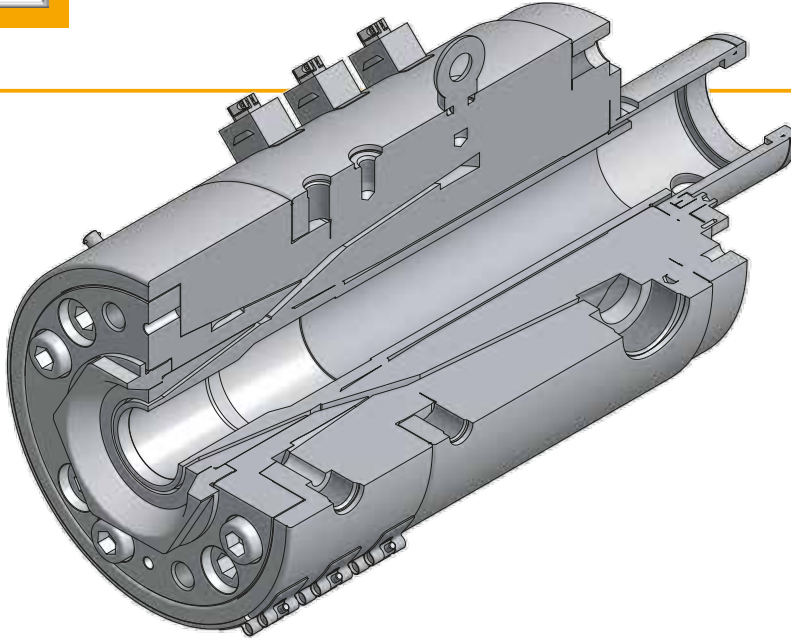


- Main entry port diameters:
Standard $\varnothing 45$ mm, M70x2
- Auxiliary entry port diameters:
Standard $\varnothing 15$ mm - M30x2
- Number of heating zones:
Crosshead 2
Main extruder connection 1
Auxiliary extruder connection 1
- Weight, approximately 270 kg

General Dimensions

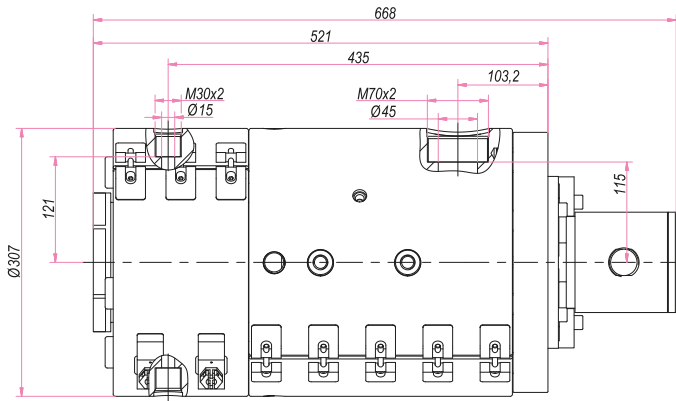


Applications


- Main applications:
Single layer
Single layer + striping
Single layer + skin coloration
- Centering system: Fix



SINGLE LAYER



STRIPE



SKIN

Specifications

- With compression tooling
Maximum inlet diameter 80 mm
Maximum die diameter 90 mm
- With tubing tooling
Maximum die diameter 95 mm

Options

- Striping
- Skin coloration
- Optimized Distributor for particular polymer
- Vacuum connection
- Extruder connection:
With bypass: manual
Temperature gauge and pressure gauge
- Crosshead trolley

UYGAR
MAKİNA SANAYİ
VE
TİCARET LİMİTED
ŞİRKETİ



TEL +90.258.371 66 25 FAX +90.258.371 74 37

WEB www.um.com.tr

ADDRESS Bozburun Mahallesi 7055 Sokak

No: 5 Denizli/Turkey

E-MAIL info@um.com.tr